

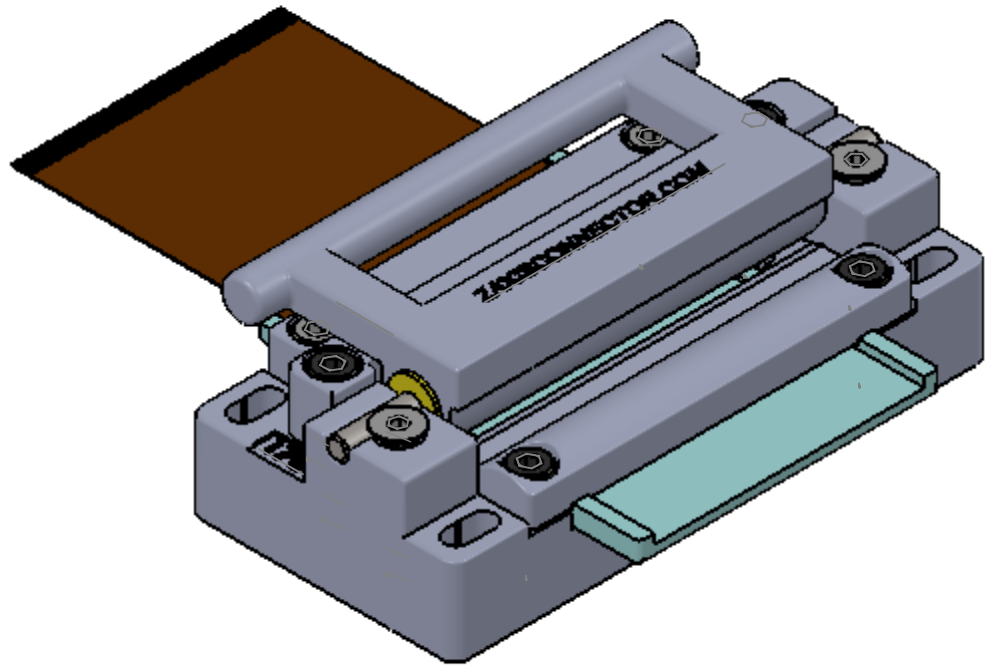


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

MAXIMUM FLEX WIDTH IS .5mm X 100 TRACES. TEST EQUIPMENT FLEX LENGTH COMES IN TWO STANDARD LENGTHS - 102mm AND 76mm. PLEASE SPECIFY. LONGER LENGTHS ARE CONSIDERED CUSTOM

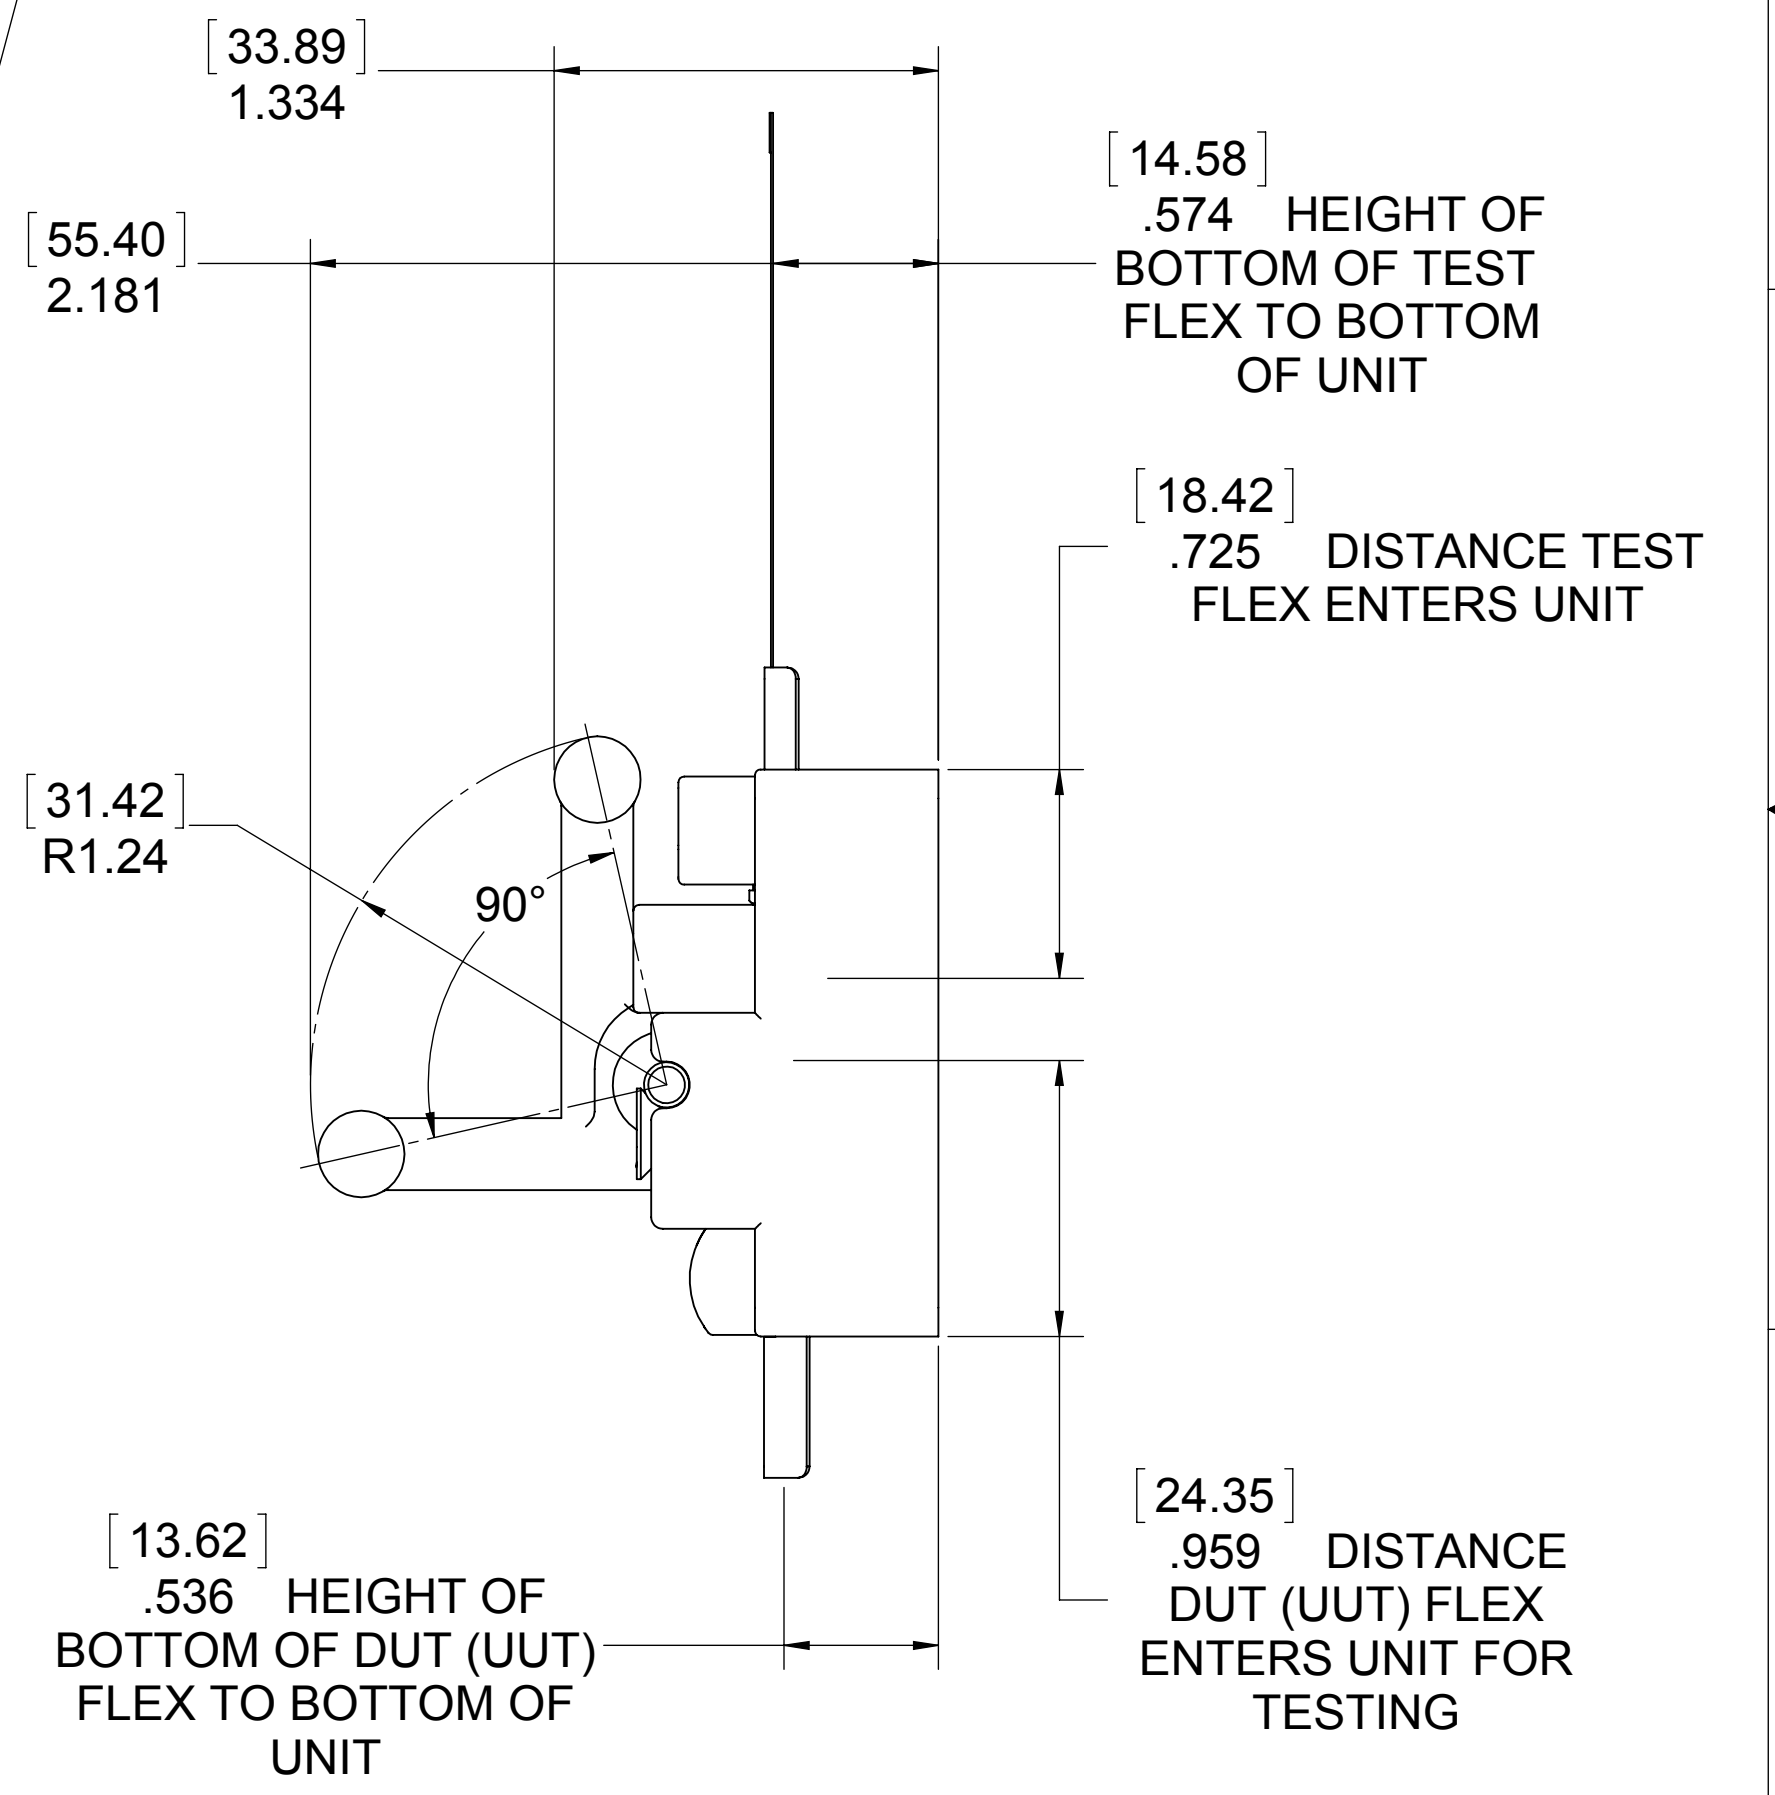

4X CLEARANCE FOR M4 OR 8-32 SCREWS

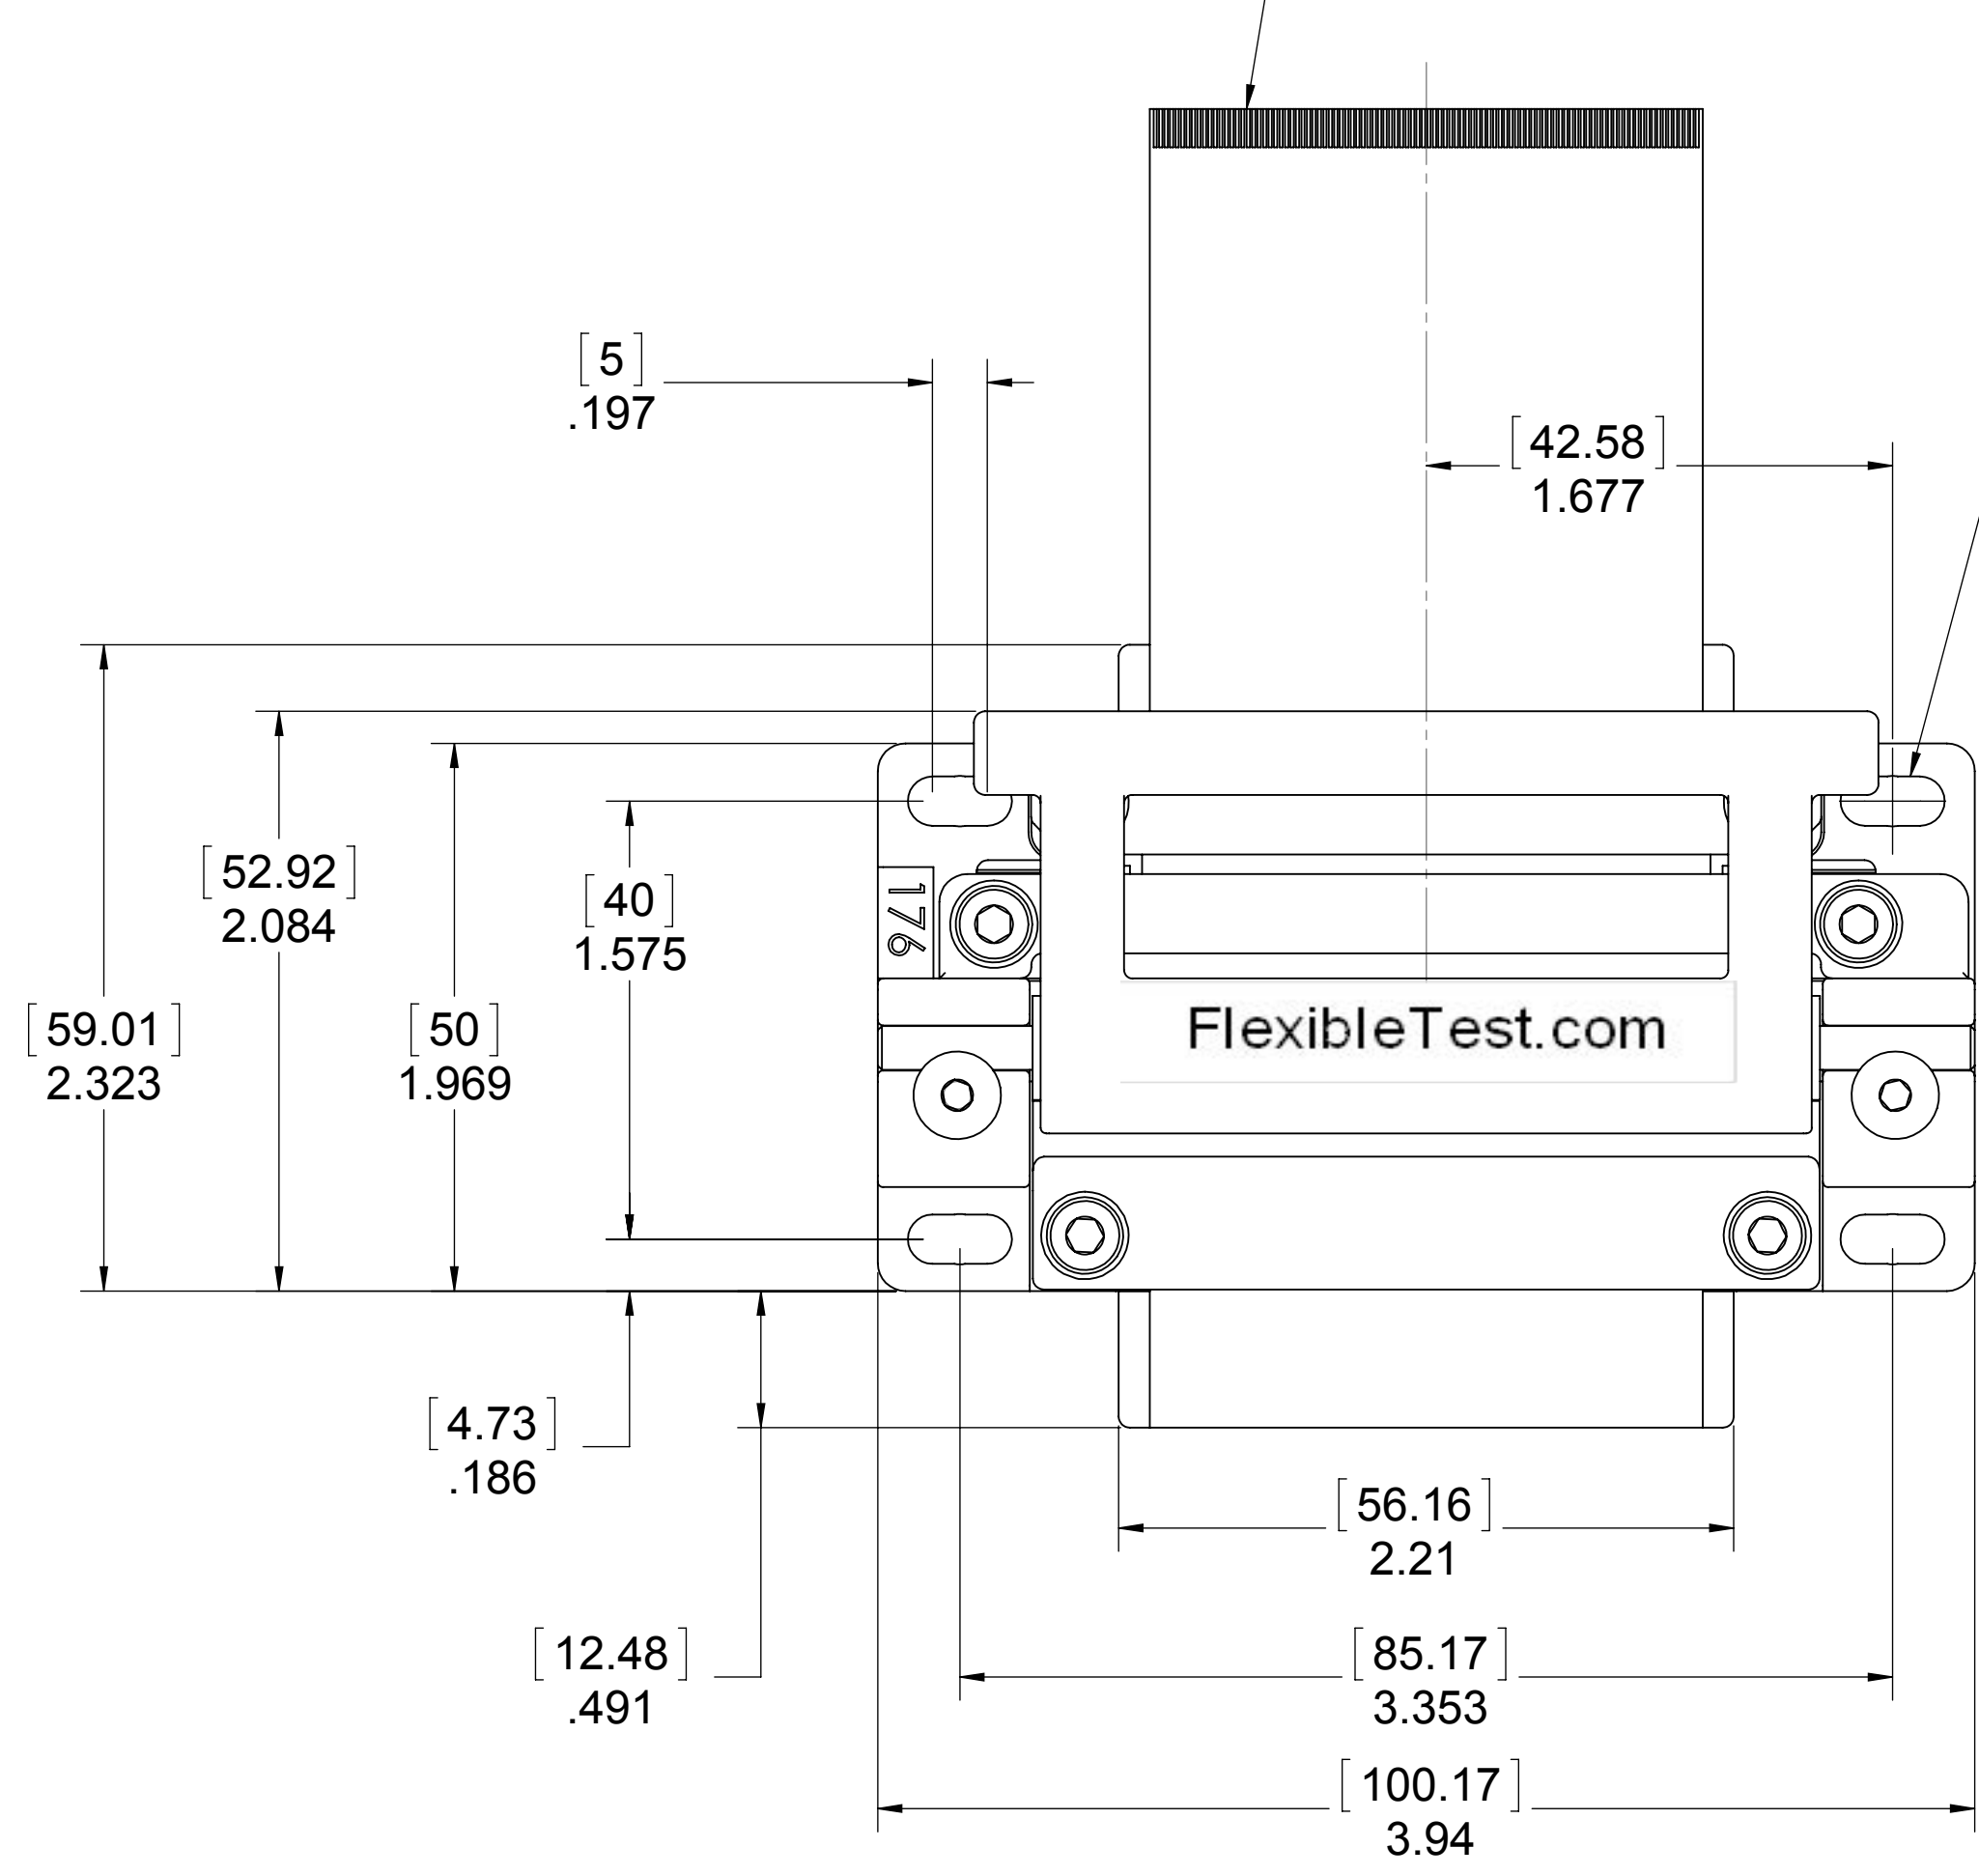

NOTE: FOR THIS UNIT TRACES ON DUT (UUT) FLEX MUST BE FACING DOWN. TRACES ON FLEX GOING TO TEST EQUIPMENT ARE ALSO DOWN, BUT CAN BE MADE TO FACE UP IF A FLIPOVER FLEX IS USED.

www.flexibletest.com

VIEWS ARE GENERATED BY THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	DRAWN	RCK	9/7/17	Z-AXIS CONNECTOR CO. TITLE: ORIGINAL UP MEDIUM FFC
	TOLERANCES: FRACTIONAL ± 1/32 ANGULAR: MACH ± 1/2° BEND ± TWO PLACE DECIMAL ± .010 THREE PLACE DECIMAL ± .005 FOUR PLACE DECIMAL ± .0002	CHECKED			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Z-AXIS CONNECTOR CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Z-AXIS CONNECTOR CO. IS PROHIBITED.	INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL	ENG APPR.			Q.A. COMMENTS:
NEXT ASSY USED ON	FINISH				SCALE: 1:1 WEIGHT: SHEET 1 OF 1